Stainless steel radiator straight 1600 x 500

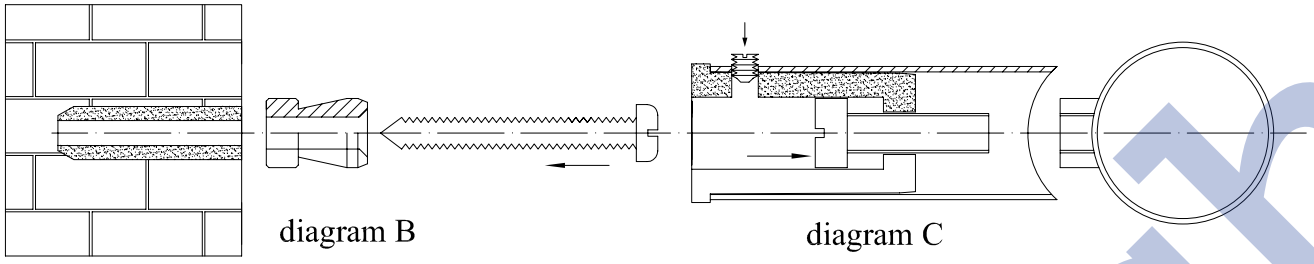

diagram B

diagram C

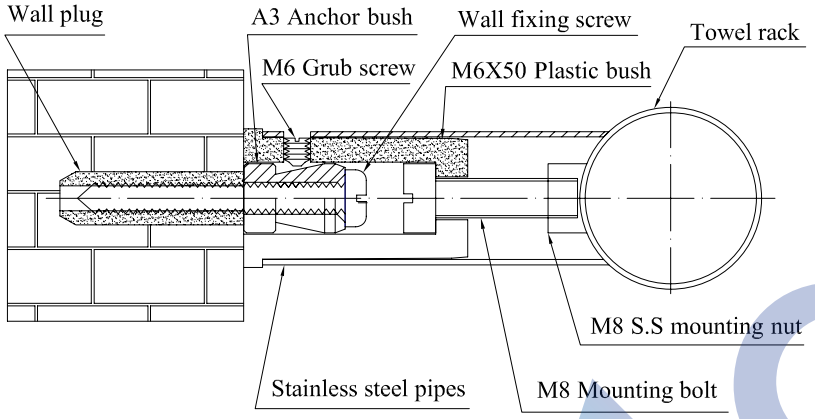

diagram D

PARTS:

Quantity	Description
1	304 stainless steel ladder radiator
4	Stainless steel mounting brackets
4	M8 bracket to rail mounting bolts
4	M6 Grub Screws
4	A3 anchor bushes
4	Wall plugs
4	65mm wall fixing screws

BLEED VALVE



A:Metal washer
B:Coloured fibre washer
C:Translucent silicone washer

diagram E

T:1/2" Tapping D:Dead end Pipes centres: 50 mm

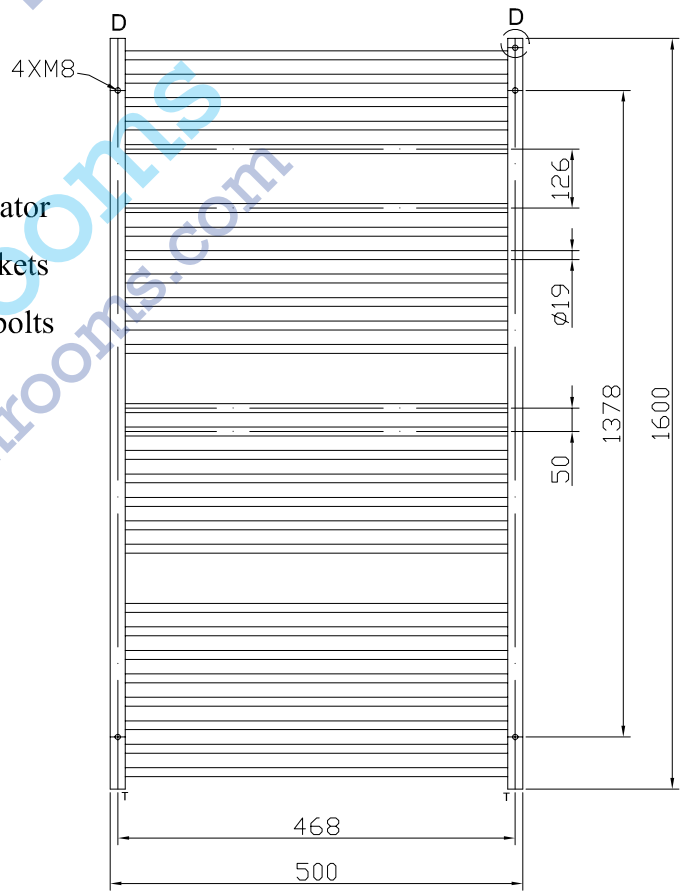

diagram A

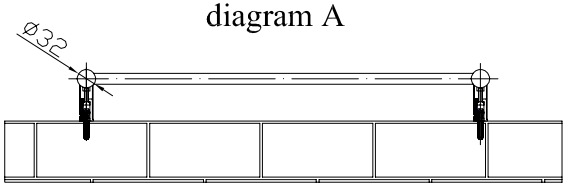

Model:TWSSST 165

Installation

1).Secure the mounting bracket to the radiator M8 nuts using the M8 mounting bolts.(diagram C)

2).Position the radiator onto the wall and mark out the fixing positions.(diagram A)

3).Drill 4xØ9 holes into the wall.(diagram B)

4).Insert the wall plugs and using the 65mm wall screws secure the A3 anchor bush to the wall.(diagram B)

5).Place the radiator and its mounting brackets onto the A3 anchor bushes and secure into position using the M6 grub screws.(diagram D)

6).CAUTION:Please ensure that the bleed valve washer are placed in the correct order as indicated in.(diagram E).Do not over tighten.

gush bathrooms www.gushbathrooms.com